


HI-PRECISION MINIATURE BALL SLIDES

4 TO 30 LBS LOAD CAPACITY

TRAVEL
0.5 TO 4.0 INCH

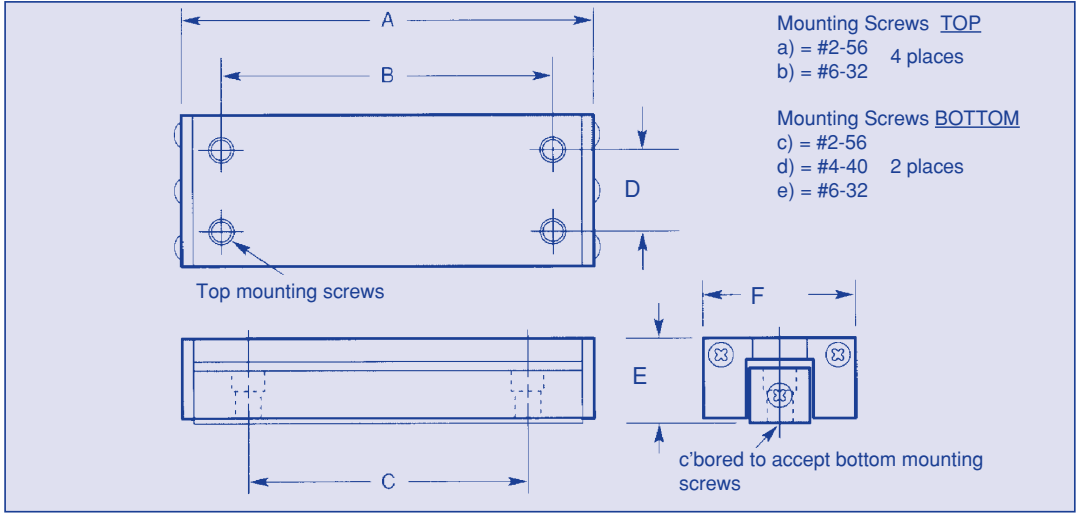

Material: Aluminum/Stainless Steel

Specifications: Straight line accuracy .00025 in/in of travel.

Finish: Black Anodize

ORDER BY CATALOG NUMBER

Cat. No.	Travel	Load	Length	Mounting Dimensions			Top Height	Width	Mtg Screws	
				Top	Bottom				Top	Bottom
				A	B	C				
MAX-A1-1	0.5	4	1.12	.63	.75	.218	.32	.59	a)	c)
MAX-A1-2	0.5	8	1.12	.63	.751	.375	.40	.75	a)	c)
MAX-A1-3	0.5	10	1.68	1.25	1.25	.437	.50	1.00	b)	d)
MAX-A1-4	0.75	15	1.68	1.25	1.13	.437	.53	1.06	b)	e)
MAX-A1-5	1.0	8	2.12	1.63	1.38	.218	.32	.59	a)	c)
MAX-A1-6	1.0	10	2.12	1.63	1.38	.375	.40	.75	a)	c)
MAX-A1-7	1.0	12	2.68	2.25	2.25	.437	.50	1.00	b)	d)
MAX-A1-8	1.5	18	2.68	2.25	2.13	.437	.53	1.06	b)	e)
MAX-A1-9	2.0	12	3.12	2.63	2.38	.218	.32	.59	a)	a)
MAX-A1-10	2.0	12	3.12	2.63	2.38	.375	.40	.75	a)	a)
MAX-A1-11	2.0	15	3.68	3.25	3.25	.437	.50	1.00	b)	d)
MAX-A1-12	2.0	20	3.56	3.25	3.13	.437	.53	1.06	b)	e)
MAX-A1-13	3.0	14	4.12	3.63	3.38	.218	.32	.59	a)	c)
MAX-A1-14	3.0	14	4.12	3.63	3.38	.375	.40	.75	a)	c)
MAX-A1-15	3.0	25	4.68	4.00	3.25	.437	.53	1.06	b)	e)
MAX-A1-16	4.0	30	6.00	5.50	4.00	.437	.53	1.06	b)	e)



Special hole modifications, sizes and custom machining available.