

BALL SLIDE ASSEMBLIES

continued from 27M


SPECIFICATIONS:

Straight line accuracy
Positional repeatability
Coefficient of friction
Construction

0.0005"/inch of travel
 0.0002"
 0.003 typical
 Aluminum carriage and base, hardened steel shafts and balls, mild steel end caps
 Clear anodized carriage and black anodized base.
 Other finishes on request

Finish

For metric sizes please call.
 See page 27M for detailed drawing

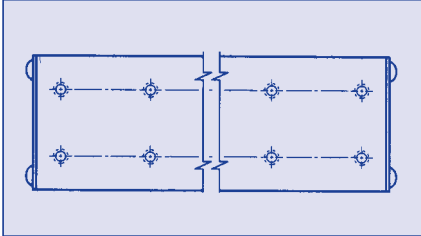

* Travel is 1/2 distance from center in either direction

Model	Travel *	Load Capacity LB	Weight OZ	Length A	Height B	Width C	Carriage Hole Spacing		Base Dimensions		
							D	E	Height F	Width G	Hole Spacing H
MGX-B1-1	.75	15	1.3	1.56	.53	1.06	1.250	.437	.312	.500	1.125
MGX-B1-2	1.50	18	2.3	2.56	.53	1.06	2.250	.437	.312	.500	2.125
MGX-B1-3	2.00	20	3.0	3.56	.53	1.06	3.250	.437	.312	.500	3.125
MGX-B1-4	3.00	25	5.2	4.56	.53	1.06	4.000	.437	.312	.500	3.250
MGX-B1-5	4.00	30	6.0	6.00	.53	1.06	5.500	.437	.312	.500	4.000
MGX-B1-6	1.00	15	2.9	2.00	.62	1.50	1.375	.625	.340	.750	1.500
MGX-B1-7	2.00	20	4.3	3.00	.62	1.50	2.375	.625	.340	.750	2.500
MGX-B1-8	3.00	25	6.0	4.00	.62	1.50	3.375	.625	.340	.750	3.500
MGX-B1-9	3.50	30	6.7	5.00	.62	1.50	4.375	.625	.340	.750	3.500
MGX-B1-10	4.00	35	8.2	6.00	.62	1.50	5.375	.625	.340	.750	4.000
MGX-B1-11	1.00	20	4.0	2.00	.75	1.75	1.375	.875	.400	.875	1.625
MGX-B1-12	1.50	30	6.0	2.75	.75	1.75	2.125	.875	.400	.875	2.250
MGX-B1-13	2.00	42	6.5	3.25	.75	1.75	2.625	.875	.400	.875	2.750
MGX-B1-14	3.00	52	8.0	4.00	.75	1.75	3.375	.875	.400	.875	3.500
MGX-B1-15	4.00	60	11.8	6.00	.75	1.75	5.500	.875	.400	.875	4.000
MGX-B1-16	1.00	30	10.0	2.62	1.00	2.62	2.125	1.250	.625	1.500	2.125
MGX-B1-17	1.50	35	10.0	2.62	1.00	2.62	1.625	1.250	.625	1.500	1.875
MGX-B1-18	2.00	62	15.0	4.00	1.00	2.62	3.000	1.250	.625	1.500	3.375
MGX-B1-19	3.00	88	20.8	5.00	1.00	2.62	4.000	1.250	.625	1.500	4.375
MGX-B1-20	4.00	118	27.2	6.00	1.00	2.62	5.000	1.250	.625	1.500	5.375

M